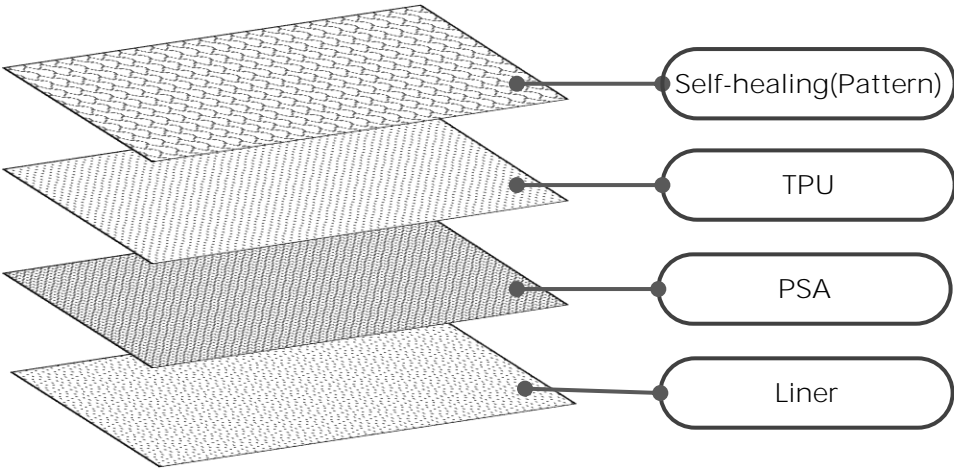


## Technical Data Sheet

<b>Product Name</b>	DYNODamascus				
<b>Application</b>	Paint Protection Film				
<b>Thickness</b>	190±10μm				
<b>Properties</b>	<b>Properties</b>		<b>Unit</b>	<b>Value</b>	<b>Test Method</b>
	Thickness		μm	190±10	Thickness gauge
	Coating layer crack	MD	mm	54	ASTM D 412
		TD	mm	55	
	Self-Healing		sec	under 30	Room Temp.
	Adhesion (30 min)		gf/25mm	> 1400	ASTM D3330
	Adhesion (24 hours)		gf/25mm	> 2200	
<b>Product Structure</b>	 <p>The diagram illustrates the multi-layered structure of the DYNODamascus Paint Protection Film. It consists of four distinct layers stacked vertically. From top to bottom, the layers are: a Self-healing layer with a patterned surface, a TPU (Thermoplastic Polyurethane) layer, a PSA (Pressure Sensitive Adhesive) layer, and a Liner layer. Each layer is represented by a different texture and shading to distinguish them.</p>				
<b>Characteristic</b>	<ul style="list-style-type: none"> <li>- Hydrophobic &amp; Self-Healing</li> <li>- Clear type high gloss finish protection</li> <li>- Gorgeous pattern image with delicate rainbow effect</li> <li>- Anti-Contamination</li> </ul>				